
intertek
Total Quality. Assured.

Certificate of Compliance

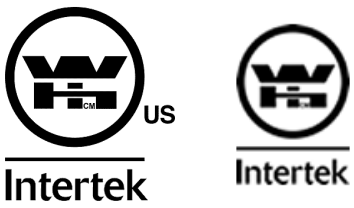

This is a certificate of compliance to certify that the bearer has successfully completed the requirements of the above scheme which include the testing of products, the initial assessment, and are subject to continuing annual assessments of their compliance and testing of samples of products taken from production (as applicable to the scheme) and has been registered within the scheme for the products detailed.

You have been awarded:

Intertek WH US Mark and WH Service Mark 2014 for Category D - Door/frame Assemblies

Standards: BS 476 Part 22 (1987), UL 10(c) (2016), UL 10(b) (2008) (R2015), NFPA 252 (2017)

Certificate number: WHI25-28731465

Organization: ARFAD International Industry Company
Building No. 4177, Road 118, 3rd Industrial Area
Al Jubail 35729
Kingdom of Saudi Arabia

Product: Halspan – UniversaL 60 Enhanced Core Single Leaf Wooden Door Assembly – 60-Minutes – UL 10C
Spec ID: 75646
Fire Rating: 60 Min PP Category D Door/Frame Assemblies
Listing Information: See following page(s)

Certification body: Intertek Testing Services NA, Inc.
Initial registration: February 19, 2025
Date of expiry: December 31, 2026
Issue status: 2

Authorized By: _____
Jean-Philippe Kayl, Director of Certification

Intertek Testing Services NA, Inc.
545 E. Algonquin Road, Ste H., Arlington Heights, IL 60005 USA
Phone: 847-439-5667 Fax: 847-439-7320

www.intertek.com

The certificate and schedule are held in force by regular annual surveillance visits by Intertek Testing Services NA, Inc. and the reader or user should contact Intertek to validate its status. This certificate remains the property of Intertek Testing Services NA, Inc. and must be returned to them on demand. This Certificate is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this certificate. Only the Client is authorized to permit copying or distribution of this certificate and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

LISTING INFORMATION

Product Covered
Halspan – UniversaL 60 Enhanced Core Single Leaf Wooden Door Assembly – 60-Minutes – UL 10C

Product Description
45mm thick Halspan UniversaL 60 Enhanced Core Single Leaf door leaf in 45mm thick mineral composite door frames.

Maximum sizes:
Door Frame: 1260 x 2480 x 120mm (w x h x jamb depth)
Door Leaf: 1200 x 2440 x 45mm (w x h x thk)

Limitations:
Minimum latch throw - 12mm, listed mortise lockset
Supporting Construction - Masonry wall assemblies.

Note: The door leaf is allowed to be installed in hollow steel frames for 60-Minutes Integrity rating according to BS 476 Part 22 only.

Fire Rating
The product noted above has been tested and qualified per UL 10C for **60 Minutes** Positive Pressure Fire Rating.

Also meets the requirements of UL 10B for a 60 minutes Negative Pressure Fire Rating and NFPA 252 for a 60 minutes Positive Pressure Fire Rating.

Test Report Reference: ESL 0109-23-TR-02